



## ***FENOSAFE® FUEL Tank liner***

*for the storage of fuels (including biodiesel),  
Adblue, oils, hydrocarbons, and alcohols*

- DIBt approval*
- for all fuels*
- low permeation*



*made in Germany by*

**FENOTECH**

flexible • safe • innovative

[www.fenotec.eu](http://www.fenotec.eu)



General building supervision approval  
DIBt- Nr.: Z-65.30-562

**For gasoline DIN EN 228 up to E 20; alcohol DIN EN 14879-4, JET A1 and diesel DIN EN 5902**

- Meets the requirements of DIN EN 13160-7:2003
- Meets the requirements of the following DIN EN 13160-7: 2016
- Developed and tested together with the TÜV (German Technical Inspection Association), the PTB (National Metrology Institute of Germany) and the BAM (Federal Institute for Materials Research and Testing).

## FAST INSTALLATION - SAFE OPERATION


- Installation of the tank casing only with short interruptions of the day-to-day business.
- Connection of accessories and leak detector is also possible without entering the tank.
- Effective leak protection and corrosion protection of the tank interior.

## FENOSAFE® FUEL DIBt APPROVAL – PERMEATION 15-TIMES BELOW THE NORM

The ratio of **FENOSAFE® FUEL** to the DIN-NORM:

Max. permeation of fuel to pass through the film:

g/d m<sup>2</sup>

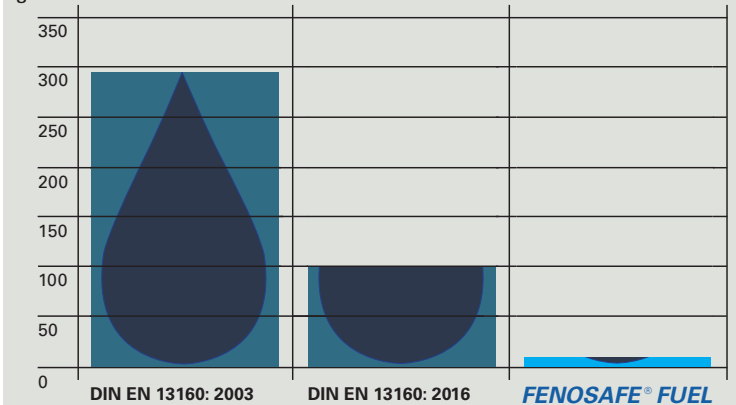

TANK LINER	<b>FENOSAFE® FUEL</b>	<b>FENOSAFE® U</b>	<b>FENOSAFE® Blue</b>
DIBt-approval No.	Z-65.30-562	Z-65.30-487	Z-65.30-487
<b>FUEL:</b>			
Gasoline DIN EN 228 to E20	●	-	-
Alcohol DIN EN 14879-4	●	-	-
JET A1	●	-	-
Diesel DIN EN 590, up to 20% Biodiesel	●	●	-
Heating oil EL DIN 51603-1	-	●	-
Diesel exhaust fluid DIN 70070	-	-	●
Gasoline blends E5, E10, E20... E100	●	-	-
Biodiesel	●	-	-